

Metallic Ring Type Joint gaskets are heavy duty, high-pressure gaskets largely used in offshore petrochemical applications.

Ring Type Joints (RTJ) are precision-engineered components designed to be used in conjunction with precision-machined flanges. All our Ring Joints are manufactured according to ASME B16.20 and API 6A.



## RTJ Styles

A number of Ring Joint styles are available designed for specific flange types, and these are given in the below table:

TYPE	NOMINAL PIPE SIZE	CLASS RATINGS
<b>Type R Oval &amp; Octagonal</b>	1/2" to 24"	150 to 2500 ASME B16.20
	26" to 36"	300 to 900 ASME B16.20
	1 1/2" to 20"	Series A API 6A
<b>Type RX</b>	1 1/2" to 24"	720 to 5000 ASME B16.20
	26" to 36"	300 to 900 ASME B16.20
	1 1/2" to 20"	Series A API 6A
<b>Type BX</b>	1 11/16" to 21 1/4"	5000 to 20000 ASME B16.20

Please note that the properties shown here are typical and suitability for actual application should always be determined by a suitably qualified Engineer. Specifications are subject to change without notice.

## Materials

The gasket material is selected on a number of grounds primarily; chemical compatibility with the media and the hardness of the flange. The gasket material ideally needs to be less than the flange material to ensure sufficient deformation of the gasket without damaging the flange facing. Some common materials are listed in the table below.


MATERIAL	HARDNESS BRINELL	TEMP. RANGE	MARKING
Soft Iron	90	-60 to 500°C	D
Low Carbon Steel	120	-40 to 500°C	S
4-6% Cr 1/2% Mo	130	-125 to 500°C	F5
304	160	-250 to 650°C	S304
316	160	-196 to 800°C	S316
321	160	-250 to 870°C	S321
347	160	-250 to 870°C	S347
410	170	-20 to 500°C	S410
Monel (N04400)	135	400°C	N04400
UNS N08904	180	400°C	904L
Inconel 625	200	+1000°C	625
Incoloy 825	160	+1000°C	825
Hastelloy C-276	200	+1000°C	C-276
Titanium	160	+540°C	TI

## Ring Joint Styles




Type R Oval

- » The original ring joint design can be used on standard flat bottomed groove flanges and older round bottomed groove flanges
- » Can be used for ASME B16.5 flange class 150 to 2500 and API 6B to Class 5000
- » Soft iron and carbon steel gaskets are zinc plated to prevent corrosion
- » All rings are marked with the ring number, material and the date of manufacture and API designation.

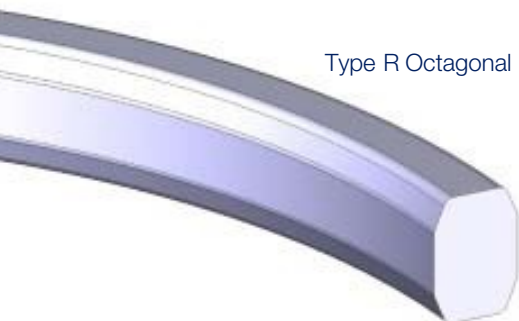

Type R Octagonal

- » An improvement on the original oval design
- » Can be used on standard flat bottomed groove flanges
- » Available for use on ASME B16.5 flange class 150 to 2500, ASME B16.47 Series A flanges and API 6B to Class 5000
- » Soft iron and carbon steel gaskets are zinc plated to prevent corrosion
- » All rings are marked with the ring number, material and the date of manufacture and API designation.

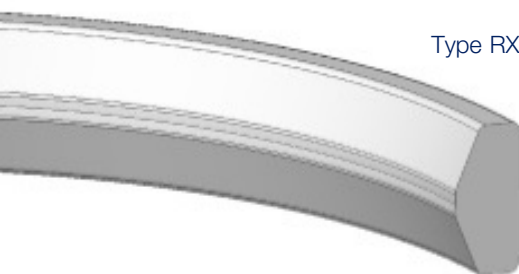

Type RX

- » Interchangeable with Type R gaskets
- » Pressure energised; as the internal pressure increases the sealing force increases
- » The outer sealing faces make initial contact with the slightly smaller flange groove allowing the gasket to impart additional sealing force
- » Can be drilled with additional hole to create a gasket suitable for subsea installation Type “SRX”
- » Suitable for use on ASME B16.5, API 6B to Class 5000 and ASME B16.47 Series A flanges



Type BX

- » Suitable for use on API 6BX Flanges up to Class 20000
- » During installation the ring is compressed inwards to provide additional sealing stress
- » Pressure energised; as the internal pressure increases the sealing force increases
- » Type BX rings are supplied with pressure relief holes to avoid compressing fluid beneath the gasket
- » Can be drilled with additional hole to create a gasket suitable for subsea installation Type “SBX”

All information is based on years of experience in production and operation of sealing elements. However, in view of the wide variety of possible installation and operating conditions one cannot draw final conclusions in all application cases regarding the behaviour in gasket joint. The data may not, therefore, be used to support any warranty claims. This edition cancels all previous issues. Subject to change without notice.

---

**KLINGER Limited**

**AUSTRALIA**

Western Australia – Head Office  
38 McDowell Street  
Welshpool WA 6106

Queensland

Unit 3, 5-7 Roseanna Street  
Gladstone QLD 4680

Tel.: 1300 798 279  
(calls within Australia)

Tel: +61 8 9251 1688  
(calls outside Australia)

**NEW ZEALAND**

Tel: +64 272 735 045

**SINGAPORE**

105 Cecil Street #07-01, The Octagon  
Singapore 069534  
Tel: +65 6827 9045

**KLINGER Thailand**

501/2 Moo 2, Tambol Mabyangporn  
Amphur Ruak Daeng  
Rayong 21140 Thailand  
Tel: +66 3306 0154