

Applications

- » Circulating water pumps
- » Crude oil multistage pumps
- » Open and closed cooling water pumps
- » River water pumps
- » Screen wash pumps
- » Sump pumps

Availability

Greene Tweed manufactures AR[®]HT machined components worldwide at our own QRCs (Quick Response Centers), dedicated machine centers, making them readily available in short-lead times. Greene Tweed's on-site manufacturing capabilities allow us to produce simple or complex parts to our customers' specifications. Billet sizes range from diameters of 1 in. to 58 in. (2.5 cm to 147 cm) with lengths up to 8 in. (20 cm) (depending on diameter and wall thickness).

Abrasive-Resistant Thermoplastics

AR[®]HT is a proprietary thermoplastic material specifically developed for use as bushings, bearings and wear rings in pumps handling abrasive media up to 250°F (120°C). AR[®]HT provides outstanding chemical, thermal shock and impact resistance, making it a better wear material than traditional rubber, ceramic or bronze materials.

Greene Tweed's proprietary AR thermoplastic materials exhibit outstanding wear characteristics in media containing solids. AR combines excellent abrasive resistance, good dry run capability and superior vibration dampening characteristics with no hydrolysis or swell.

AR[®]HT works well in a variety of abrasive pump applications including those working with circulating water, open and closed cooling water, river water, screen wash and crude oil pumps. When using AR[®]HT pump users can operate their equipment with much tighter clearances, boosting efficiency and improving process reliability. AR[®]HT is API 610 approved for stationary wear applications.

Features and Benefits


- » Increased high-temperature range makes it ideal for hot water, crude oil and abrasive hydrocarbon applications
- » Improvement of pump reliability over traditional bearing materials due to lower wear in abrasive media
- » Nongalling and non-seizing properties help avoid unplanned shutdowns due to pump failures caused by excessive vibration or dry-run startup
- » Extends lifetime and operation of mechanical seals and pumps due to excellent vibration dampening characteristics
- » Lower coefficient of friction aids survival in "off design" pump conditions, such as intermittent dry run, better than traditional materials like cutlass rubber
- » Easy to machine and install to exact finished dimensions, reducing pump repair turnaround times and lowering repair costs
- » Low hydrolysis or swell makes designing parts easier and helps maintain their physical properties in water applications
- » Very good physical properties allow the bearings to receive impact from the shaft or shaft sleeve without breaking or cracking during operation

Typical Properties*	
Physical Properties (ASTM Standard)	Typical
Color	Gray
Specific Gravity (D792)	1.63
Hardness, Shore D (D2240)	80
Mechanical (ASTM Standard)	
Compressive Strength, psi (MPa) (D695)	9,800 (70)
Elongation, % (D638)	2.2
Flexural Modulus 0.5% Secant, psi (MPa) (D790)	495,000 (3,400)
Flexural Strain @ Break, % (D790)	2.9
Flexural Strength @ Break, psi (MPa) (D790)	8,700 (60)
Tensile Modulus 0.5% Secant, psi (MPa) (D638)	461,000 (3,200)
Tensile Strength, psi (MPa) (D638)	5,100 (35)
Young's Flexural Modulus, psi (MPa) (D790)	527,000 (3,600)
Young's Tensile Modulus, psi (MPa) (D638)	562,000 (3,900)
Thermal	
Coefficient of Thermal Expansion, in./in./°F (mm/mm/°C), (-100°F to 250°F/-73°C to 121°C)	16 x 10 ⁻⁶ (28.8 x 10 ⁻⁶)

* When using AR[®]HT in subambient applications interference fit adjustments and mechanical retention methods must be considered. Please contact GT engineering for guidance and design recommendations.

Greene Tweed AR[®] Series vs. Traditional Materials

The chart shows percent weight change (loss) per hour of Greene Tweed's AR[®] materials compared to traditional materials.

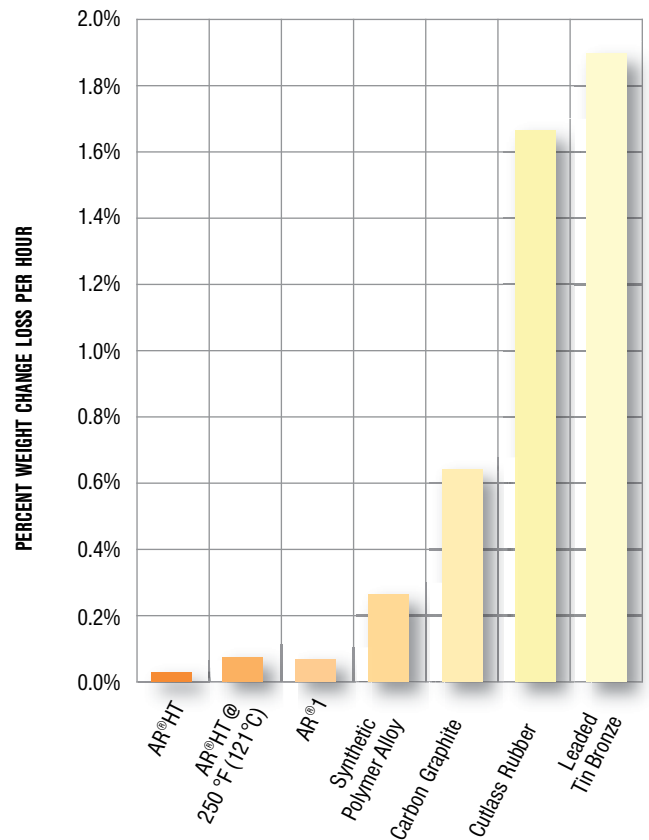

Note: Bearings made from each of the materials (size: 2 in. x 1.5 in. x 1.5 in./5.10 cm x 3.80 cm x 3.80 cm) were tested at 900 rpm under 25 psi (0.172 MPa). The run time of the test was eight hours. The test was conducted on 300 series SS shaft, in 95 percent water and 5 percent silica sand. All materials were tested at 70°F (20°C). Additionally, AR[®]HT was tested at 250°F (120°C) in ethylene glycol.

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.

KLINGER Limited

AUSTRALIA

Western Australia - Head Office
38 McDowell Street
Welshpool WA 6106

Queensland
Unit 3, 5-7 Roseanna Street
Gladstone QLD 4680

Tel: 1300 798 279
(calls within Australia)

Tel: +61 8 9251 1688
(calls outside Australia)

NEW ZEALAND

Tel: +64 272 735 045

SINGAPORE

105 Cecil Street #07-01, The Octagon
Singapore 069534
Tel: +65 6827 9045

KLINGER Thailand

501/2 Moo 2, Tambol Mabyangporn
Amphur Ruak Daeng
Rayong 21140 Thailand
Tel: +66 3306 0154